

## Motorcycle Battery (MT Series) YT12B-BS (12V 12Ah)

### Specifications

Rated Voltage	12V
Nominal Capacity	12 Ah C10 1,8V/cell
Dimension	Length 150±2mm Width 70±2mm Container Height 130±2mm
Approx Weight	3.12 Kg
Terminal	C9
Container Material	ABS
CCA@-18°C	100A
Retention of Charge Storage %25°C	1 month 97% 3 month 90% 6 month 80% 12 month 40%
	Directly Mounted Directly Mounted Contact Volts: 14,4V Limit Current: 2A Charging Hours: 2-3H Contact Volts: 14,4V Limit Current: 2A Charging Hours: 4-6H



### Applications


- Motorcycle
- Motorbike
- ATV (All terrain vehicle)
- Scooter
- Personal Watercraft
- Personal Snowmobile
- Garden Machinery

### General Features


- Protects against leakage and corrosion and provides for extra strength and durability.
- Absorbed Glass Matt separators absorb the electrolyte and make the battery spill proof.
- The valve regulated design eliminates water loss and the need for refilling.



### Discharge Characteristics

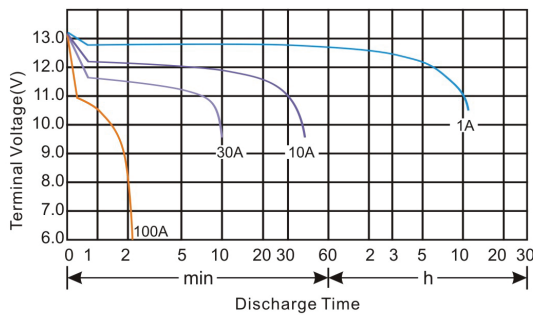

### Float Charging Characteristics

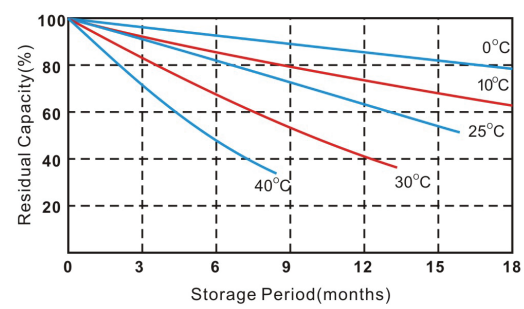

### Layout

