

## Motorcycle Battery (MT Series) YTX7A - BS (12V 7Ah)

### Specifications

Rated Voltage	12V
Nominal Capacity	7 Ah C10 1,8V/cell
Dimension	Length 150±2mm Width 87±2mm Container Height 94±2mm
Approx Weight	2.4 Kg
Terminal	C4
Container Material	ABS
CCA@-18°C	90A

	1 month	97%	Directly Mounted
	3 month	90%	Directly Mounted
	6 month	80%	Contatnt Volts: 14,4V Limit Current: 1.4A Charging Hours: 2-3H
	12 month	40%	Contatnt Volts: 14,4V Limit Current: 1.4A Charging Hours: 4-6H



### Applications


- Motorcycle
- Motorbike
- ATV (All terrain vehicle)
- Scooter
- Personal Watercraft
- Personal Snowmobile
- Garden Machinery

### General Features


- Protects against leakage and corrosion and provides for extra strength and durability.
- Absorbed Glass Matt separators absorb the electrolyte and make the battery spill proof.
- The valve regulated design eliminates water loss and the need for refilling.



### Discharge Characteristics

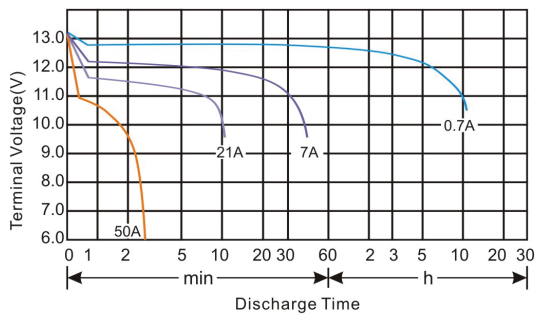

### Float Charging Characteristics

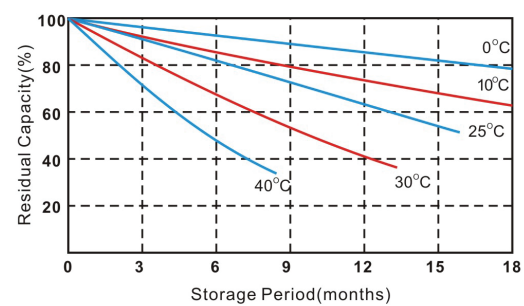

### Layout

