

Motorcycle Battery (MT Series) YTX7L - BS (12V 7Ah)

Specifications

Rated Voltage		12V
Nominal Capacity	7 Ah	C10 1,8V/cell
Dimension	Length	113±2mm
	Width	70±2mm
	Container Height	132±2mm
Approx Weight		2.24 Kg
Terminal		C3
Container Material		ABS
CCA@-18°C		85A

Retention of Charge Storage %25°C	1 month	97%	Directly Mounted
	3 month	90%	Directly Mounted
	6 month	80%	Contatnt Volts: 14,4V Limit Current: 1.4A Charging Hours: 2-3H
	12 month	40%	Contatnt Volts: 14,4V Limit Current: 1.4A Charging Hours: 4-6H



Applications


- Motorcycle
- Motorbike
- ATV (All terrain vehicle)
- Scooter
- Personal Watercraft
- Personal Snowmobile
- Garden Machinery

General Features


- Protects against leakage and corrosion and provides for extra strength and durability.
- Absorbed Glass Matt separators absorb the electrolyte and make the battery spill proof.
- The valve regulated design eliminates water loss and the need for refilling.



Discharge Characteristics

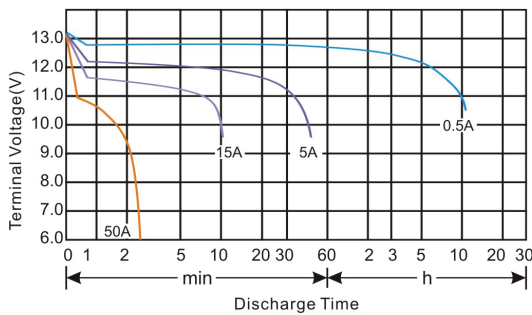

Float Charging Characteristics

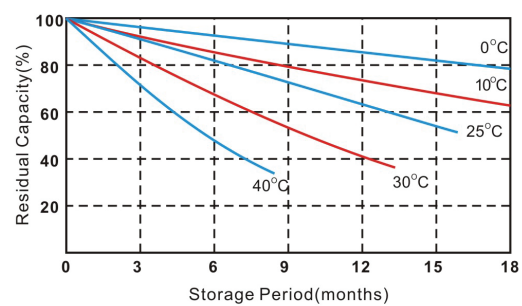

Layout

