



FIELDS OF USE

- Long lifetime
- Resistant to deep discharge
- Made from specially designed plate and active material
- Special grid alloy and minimum possible internal resistance

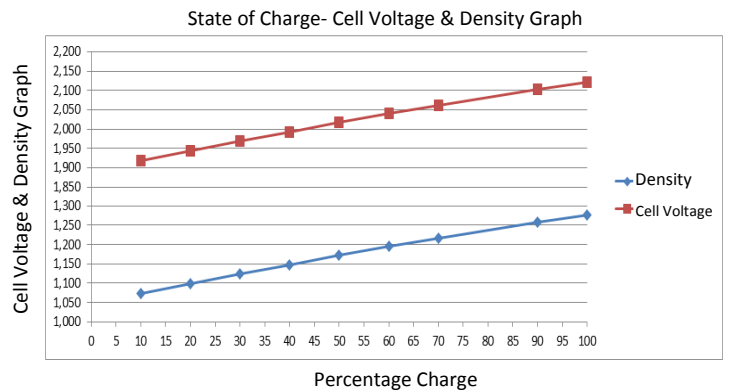

- Automatically Guided Vehicles (AGV)
- Ground Support Equipment (GSE)
- Fun Trains
- Cleaning Machinery
- Lifting Platforms
- Industrial Lifting Vehicles
- Golf Vehicles

FFP FLAT-PLATE FLOODED LONG-LIFE

DEEP CYCLE BATTERIES

Code	Design Number	Voltage [V]	Capacity [Ah]	Box Type	CCA [A(EN)]	Weight $\pm\%3$ [Kg]	Dimensions L/W/h (mm)	Capacity (Ah)				Term. Type
								C20	C10	C5	C3	
YFFP6-225	27252055E	6	225	GU		31,5	261/181/252-274	225	207	185	149,1	A-S

Electrolyte Type	Liquid
Discharge Break Voltage at D.O.D.	1,80 VDC @ (A) $\leq 0,2C$
Storage Period1	6 months @ 25 °C
Self-Discharge	5% to %15 per month depending on storage temperature
Cell Float Voltage(VDC @ 25 °C)	2,25
Cell Cycle Voltage (VDC @ 25 °C)	2,43
Balancing Cell Voltage (VDC @ 25 °C)	2,55

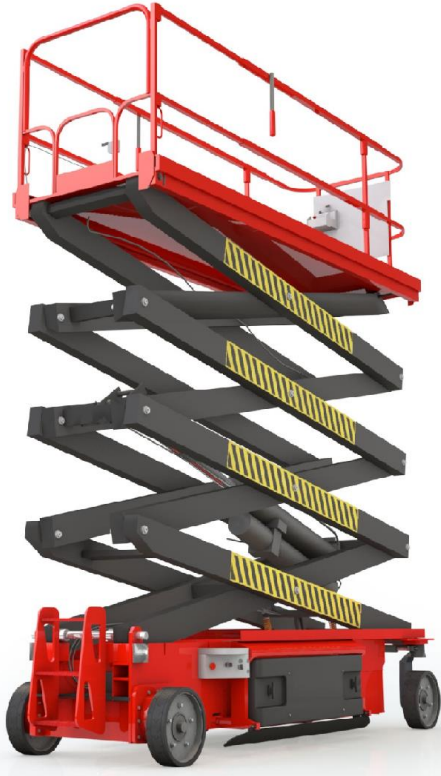



Terminal Type A
DIN 72311-4 Round Type



Terminal Type S
(M-8 Optional)





Yiğit Akü A.Ş.

Organize Sanayi Bölgesi Oğuz Caddesi No: 2 Sincan / Ankara - TURKEY
Tel: +90 312 267 02 80 - Fax: +90 312 267 08 61 - 267 40 00
endustriyel@yigitaku.com
www.yigitaku.com